


System concept

Vectron POS SteelTouch PC combines the flexibility of a PC with the performance of Vectron POS software. Thanks to the robust and high-quality stainless steel housing it is suitable for use even under unfavourable working conditions. Stand and optional wall holder provide different mounting options.

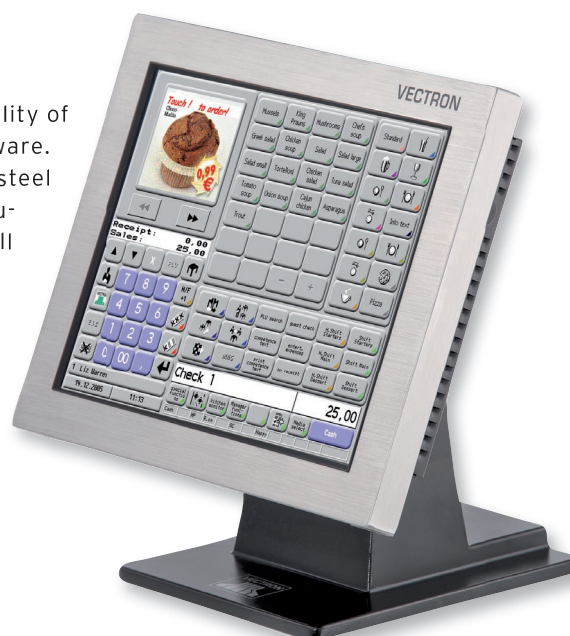

Hardware

Technical data	
Display	Brilliant 38.1 cm (15") TFT display with a resolution of 1024 x 768 pixels, 350 cd/m ² brightness, > 50,000 h service life of CCFL-back-ground lighting
Input	Reliable, touch-sensitive 5-wire analog-resistive touchpanel
Housing	Full metal housing, display frame made of stainless steel. Display front area protected according to IP55 against water and dust
Stand	Black powder-coated aluminium stand, special steel stand optionally available
Customer display	2 x 20 characters vacuum fluorescent display in stainless steel housing, integrable to the housing (optional)
Processor	Intel Celeron M with 1.06 GHz (passive processor cooling)
Main memory	1 GB DDR II RAM (max. 4 GB per 2 x SO-DIMM connector retrofittable)
BIOS	Award BIOS specially adjusted to the system
Mass storage	>= 250 GB hard disk SLIM SATA
Network	10/100/1000-BaseT Ethernet connection for network operation
Serial ports	4 x RS232 port for peripherals. 5/12V supply adjustable per jumper for COM3+COM4
USB port	4 x USB 2.0
Keyboard	PS/2 connection for external keyboard
Audio	3.5 mm jack bush for MIC and Line-Out. 2 integrable 2W loudspeakers
Parallel port	1 parallel port D-Sub 25F (reserved for hardlock of ECR software)
Cash drawers	Cash drawer port with EPSON-assignment, for connection of max. 2 cash drawers (via Y-cable) - 12V/19V supply adjustable per jumper
Operating system	Windows XP Professional OEM
Magnetic card reader	3-track-magnetic card reader with PS/2 connection attachable to housing (optional)

DATA SHEET

VECTRON POS STEELTOUCH PC



Technical data	
WLAN	Internal WLAN Mini-PCI-card with external antenna (optional retro-fitting kit)
Power supply	External power supply. Input voltage 90-240V, output voltage 19V / 90 watt. Power supply integrable in stand
Operator lock	Alternatively Dallas iButton Standard, Dallas iButton Magnet, Addimat.
Operating temperature	0 to 40°C
Storage temperature	-10 to 50°C
Certified	CE
Weight	10 kg (with aluminium stand and power supply, without customer display)

Software

Technical data	
PLUs	100000*
Departments	65535*
Operators	1000*
Guest checks or customers	65535*
Cash registers per network	200*
Printers per network	100*
*	The indicated values are maximum values, which can only be reached with special programming and optimum hardware equipment. Please contact your Vectron dealer to assist you with your special requirements.

Shipment

SteelTouch PC	
Standard shipment	POS system with operator lock as per order
	4 operator keys (for models Dallas iButton Standard and Dallas iButton Magnet)
	Black-coated aluminium stand
	Power supply with national mains plug
	User manual
	Port cover
	4 adapter cables for serial ports on RJ45 with Vectron-assignment
	CD with drivers and programs



DATA SHEET

VECTRON POS STEELTOUCH PC



SteelTouch PC	
Optional accessories	Stainless steel-table stand with VESA adapter
	Customer display in stainless steel housing
	VESA-wall mount
	3-track-magnetic card reader in stainless steel housing
	WLAN-Set (WLAN Mini PCI card, cable, driver, antenna)

Dimensions

